

RS273 Octal D-Type Flip-Flops With Clear

1 FEATURES

- **Wide Operating Voltage Range of 1.65V to 5.5 V**
- **Outputs Can Drive Up to 10 LSTTL Loads**
- **Low Power Consumption, 80 μ A Maximum I_{cc}**
- **\pm 4mA Output Drive at 4.5 V**
- **Low Input Current of 1 μ A Maximum**
- **Contain Eight Flip-Flops with Single-Rail Outputs**
- **Direct Clear Input**
- **Individual Data Input to Each Flip-Flop**
- **Micro Size Packages: TSSOP20, SOP20**

2 APPLICATIONS

- **Buffer or Storage Registers**
- **Shift Registers**
- **Pattern Generators**

3 DESCRIPTIONS

The RS273 devices are positive-edge-triggered D-type flip-flops with a direct active low clear ($\overline{\text{CLR}}$) input.

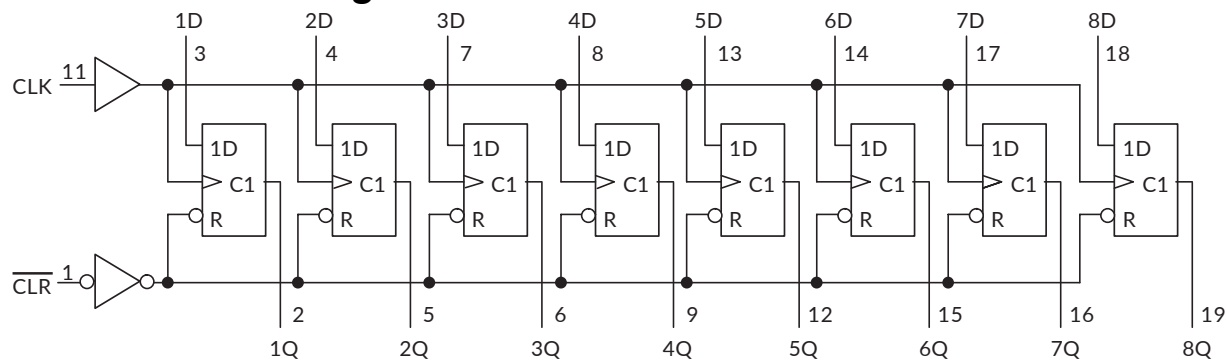
Information at the data (D) inputs meeting the setup time requirements is transferred to the Q outputs on the positive-going edge of the clock (CLK) pulse. Clock triggering occurs at a particular voltage level and is not related directly to the transition time of the positive-going pulse. When CLK is at either the high or low level, the D input has no effect at the output.

Device Information ⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
RS273	TSSOP20	6.50mm \times 4.40mm
	SOP20	12.80mm \times 7.50mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

4 Functional Block Diagram



Function Table

INPUTS			OUTPUT
CLR	CLK	D	Q
L	X	X	L
H	↑	H	H
H	↑	L	L
H	L	X	Q ₀

NOTE:
H=High voltage level
L=Low voltage level
X=don't care

Table of Contents

1 FEATURES	1
2 APPLICATIONS	1
3 DESCRIPTIONS	1
4 Functional Block Diagram	2
5 Revision History	4
6 PACKAGE/ORDERING INFORMATION ⁽¹⁾	5
7 PIN CONFIGURATIONS	6
8 SPECIFICATIONS	7
8.1 Absolute Maximum Ratings	7
8.2 ESD Ratings	7
9 ELECTRICAL CHARACTERISTICS	8
9.1 Recommended Operating Conditions	8
9.2 DC Characteristics	8
9.3 Timing Requirements	9
9.4 Switching Characteristics	10
9.5 Operating Characteristics	10
10 Parameter Measurement Information	11
11 PACKAGE OUTLINE DIMENSIONS	12
12 TAPE AND REEL INFORMATION	14

5 Revision History

Note: Page numbers for previous revisions may differ from page numbers in the current version.

Version	Change Date	Change Item
A.1	2024/03/11	Initial version completed
A.2	2024/05/17	Update KEY PARAMETER LIST OF TAPE AND REEL

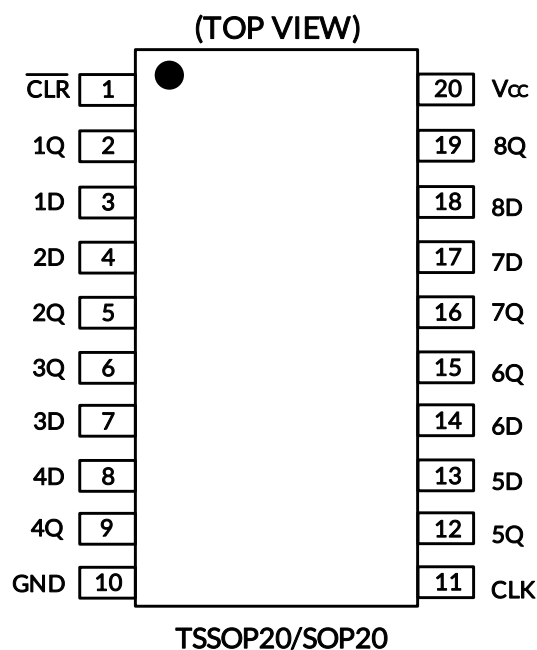
6 PACKAGE/ORDERING INFORMATION ⁽¹⁾

PRODUCT	ORDERING NUMBER	TEMPERATURE RANGE	PACKAGE LEAD	PACKAGE MARKING ⁽²⁾	MSL ⁽³⁾	PACKAGE OPTION
RS273	RS273XTSS20	-40°C ~+125°C	TSSOP20	RS273	MSL3	Tape and Reel, 4000
	RS273XS20	-40°C ~+125°C	SOP20	RS273	MSL3	Tape and Reel, 1500

NOTE:

- (1) This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the right-hand navigation.
- (2) There may be additional marking, which relates to the lot trace code information (data code and vendor code), the logo or the environmental category on the device.
- (3) MSL, The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications.

7 PIN CONFIGURATIONS



PIN DESCRIPTION

PIN	NAME	I/O TYPE ⁽¹⁾	FUNCTION
TSSOP20/SOP20			
1	$\overline{\text{CLR}}$	I	Active low clear input
2	1Q	O	Output 1
3	1D	I	Input 1
4	2D	I	Input 2
5	2Q	O	Output 2
6	3Q	O	Output 3
7	3D	I	Input 3
8	4D	I	Input 4
9	4Q	O	Output 4
10	GND	-	Ground
11	CLK	I	Clock input
12	5Q	O	Output 5
13	5D	I	Input 5
14	6D	I	Input 6
15	6Q	O	Output 6
16	7Q	O	Output 7
17	7D	I	Input 7
18	8D	I	Input 8
19	8Q	O	Output 8
20	V _{CC}	P	Power

(1) I=input, O=output, P=power

8 SPECIFICATIONS

8.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

		MIN	MAX	UNIT
V _{CC}	Supply voltage	-0.5	6.5	V
I _{IK}	Input clamp current ⁽²⁾	V _I < 0 or V _I > V _{CC}		±20 mA
I _{OK}	Output clamp current ⁽²⁾	V _O < 0 or V _O > V _{CC}		±20 mA
I _O	Continuous output current	V _O = 0 V to V _{CC}		±25 mA
Continuous current through V _{CC} or GND			50	mA
θ _{JA}	Package thermal impedance ⁽³⁾	TSSOP20		40
		SOP20		40
T _J	Junction temperature ⁽⁴⁾	-40	150	°C
T _{stg}	Storage temperature	-65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

(3) The package thermal impedance is calculated in accordance with JEDEC-51.

(4) The maximum power dissipation is a function of T_{J(MAX)}, R_{θJA}, and T_A. The maximum allowable power dissipation at any ambient temperature is P_D = (T_{J(MAX)} - T_A) / R_{θJA}. All numbers apply for packages soldered directly onto a PCB.

8.2 ESD Ratings

The following ESD information is provided for handling of ESD-sensitive devices in an ESD protected area only.

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-Body Model (HBM), MIL-STD-883K METHOD 3015.9	±2000	V
		Charged-Device Model (CDM), ANSI/ESDA/JEDEC JS-002-2018	±1000	V
		Machine Model (MM), JESD22-A115C (2010)	±200	V



ESD SENSITIVITY CAUTION

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9 ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (TYP values are at $T_A = +25^\circ\text{C}$, Full= -40°C to 125°C , unless otherwise noted.)⁽¹⁾

9.1 Recommended Operating Conditions

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
Supply voltage	V_{CC}	Operating	1.65	5.5	V
High-level input voltage	V_{IH}	$V_{CC}=1.65\text{V}$	1.15		V
		$V_{CC}=4.5\text{V}$	3.2		
		$V_{CC}=5.5\text{V}$	3.85		
Low-level input voltage	V_{IL}	$V_{CC}=1.65\text{V}$		0.5	V
		$V_{CC}=4.5\text{V}$		1.3	
		$V_{CC}=5.5\text{V}$		1.65	
Input voltage	V_I		0	V_{CC}	V
Output voltage	V_O		0	V_{CC}	V
Input transition rise or fall	$\Delta t/\Delta V$	$V_{CC}=1.65\text{V}$		30	ns
		$V_{CC}=4.5\text{V}$		10	
		$V_{CC}=5.5\text{V}$		5	
Operating temperature	T_A		-40	125	$^\circ\text{C}$

9.2 DC Characteristics

PARAMETER	TEST CONDITIONS	V_{CC}	TEMP	MIN ⁽²⁾	TYP ⁽³⁾	MAX ⁽²⁾	UNIT
V_{OH}	$I_{OH} = -20\mu\text{A}$	1.65 V	Full	$V_{CC}-0.1$			V
		4.5 V		$V_{CC}-0.1$			
		5.5 V		$V_{CC}-0.1$			
	$I_{OH} = -4\text{mA}$	4.5 V		4			
	$I_{OH} = -5.2\text{mA}$	5.5 V		5			
V_{OL}	$I_{OL} = 20\mu\text{A}$	1.65 V	Full			0.1	V
		4.5 V				0.1	
		5.5 V				0.1	
	$I_{OL} = 4\text{mA}$	4.5 V				0.5	
	$I_{OL} = 5.2\text{mA}$	5.5 V				0.5	
I_I	All inputs	$V_I=5.5\text{V}$ or GND	25 $^\circ\text{C}$		± 0.1	± 1	μA
			Full			± 10	
I_{CC}		$V_I=5.5\text{V}$ or GND, $I_O=0$	25 $^\circ\text{C}$		0.1	8	μA
			Full			80	
C_i	$f=1\text{MHz}$	1.65V to 5.5V	25 $^\circ\text{C}$		3.2		pF

(1) All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation.

(2) Limits are 100% production tested at 25 $^\circ\text{C}$. Limits over the operating temperature range are ensured through correlations using statistical quality control (SQC) method.

(3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.

9.3 Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted) ⁽¹⁾

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC}	T _A = 25°C			T _A = -40°C to 125°C		UNIT
				MIN	TYP	MAX	MIN	MAX	
t _w pulse width	CLK		1.65		17.5		140		ns
			4.5		14		120		
			5		5		24		
			5.5		4		20		
t _{su} set-up time	nD	CLK	1.65		-7		10.5		ns
			4.5		-2		7.5		
			5		-2		7.5		
			5.5		-1		7.5		
t _h hold time	nD	CLK	1.65		-8		52.5		ns
			4.5		-3		22.5		
			5		-2		12		
			5.5		-1		10.5		

(1) This parameter is ensured by design and/or characterization and is not tested in production.

9.4 Switching Characteristics

over recommended operating free-air temperature range, $C_L = 50$ pF (unless otherwise noted) ⁽¹⁾

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CC}	$T_A = 25^\circ\text{C}$			$T_A = -40^\circ\text{C to } 125^\circ\text{C}$		UNIT
				MIN	TYP	MAX	MIN	MAX	
f_{max} maximum frequency	CLK		1.65		12		2		MHz
			4.5		32		16		
			5		50		25		
			5.5		55		27		
t_{pd}	CLK	nQ	1.65		31			52.7	ns
			4.5		8.4			14.28	
			5		8			13.6	
			5.5		7.5			12.75	
t_{PHL}	$\overline{\text{CLR}}$	nQ	1.65		8			13.6	ns
			4.5		2			3.4	
			5		1.9			3.23	
			5.5		1.8			3.06	
t_{rec}	$\overline{\text{CLR}}$	nQ	1.65		-7.5			37	ns
			4.5		-1.5			19	
			5		-1.4			14.5	
			5.5		-1.3			14	
t_t		nQ	1.65		14.5			45	ns
			4.5		5.5			22	
			5		5.2			15	
			5.5		5			15	

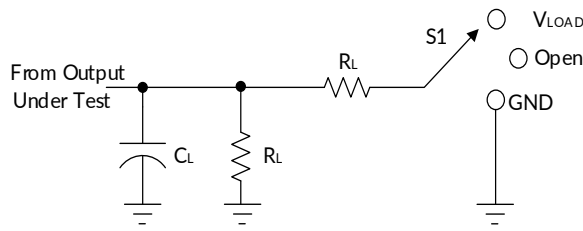
(1) This parameter is ensured by design and/or characterization and is not tested in production.

9.5 Operating Characteristics

$T_A = 25^\circ\text{C}$

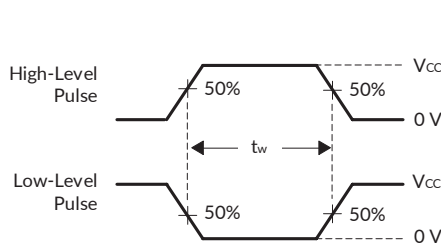
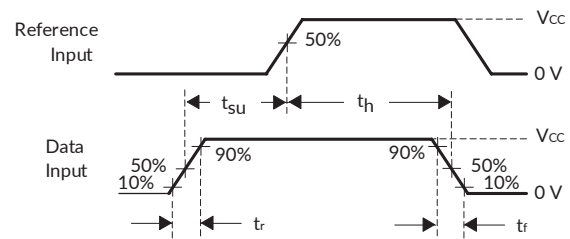
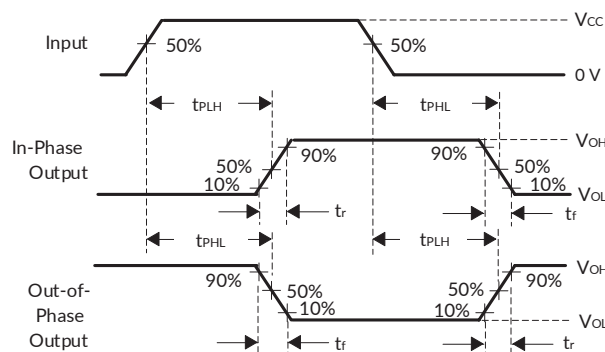
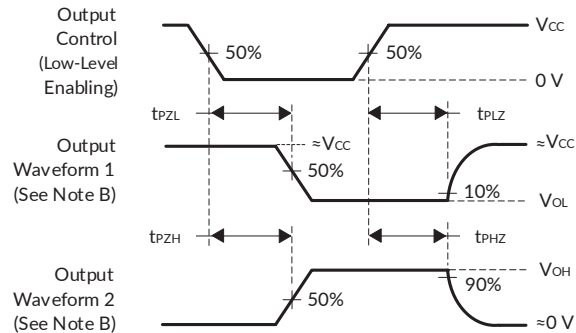
PARAMETER	TEST CONDITIONS	TYP	UNIT
C_{pd} Power dissipation capacitance per package	$V_I = \text{GND to } V_{CC}$	28	pF

10 Parameter Measurement Information


LOAD CIRCUIT

TEST	S1
t_{pd}	Open
t_{PLZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	GND

V_{CC}	V_I	V_M	C_L	R_L	V_{TP}
$1.8V \pm 0.15V$	V_{CC}	$V_{CC}/2$	50pF	1k Ω	0.15V
$2.5V \pm 0.2V$	V_{CC}	$V_{CC}/2$	50pF	1k Ω	0.15V
$3.3V \pm 0.3V$	V_{CC}	$V_{CC}/2$	50pF	1k Ω	0.3V
$5V \pm 0.5V$	V_{CC}	$V_{CC}/2$	50pF	1k Ω	0.3V

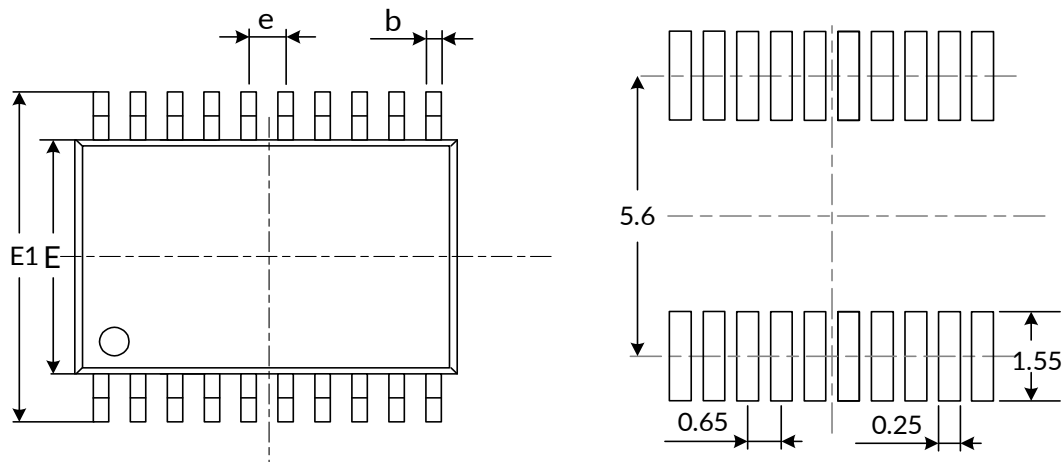

VOLTAGE WAVEFORMS PULSE DURATIONS

VOLTAGE WAVEFORMS SETUP AND HOLD AND INPUT RISE AND FALL TIMES

VOLTAGE WAVEFORMS PROPAGATION DELAY AND OUTPUT TRANSITION TIMES

VOLTAGE WAVEFORMS ENABLE AND DISABLE TIMES FOR 3-STATE OUTPUTS

- NOTES:
- A. C_L includes probe and test-fixture capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 - C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR ≤ 1 MHz, $Z_O = 50 \Omega$, $t_r = 6$ ns, $t_f = 6$ ns.
 - D. The outputs are measured one at a time with one input transition per measurement.
 - E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
 - F. t_{PZL} and t_{PZH} are the same as t_{en} .
 - G. t_{PLH} and t_{PHL} are the same as t_{pd} .

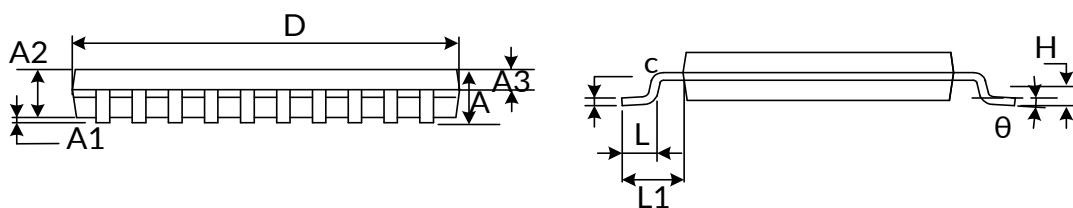
Figure 1. Load Circuit and Voltage Waveforms

11 PACKAGE OUTLINE DIMENSIONS

TSSOP20⁽⁴⁾



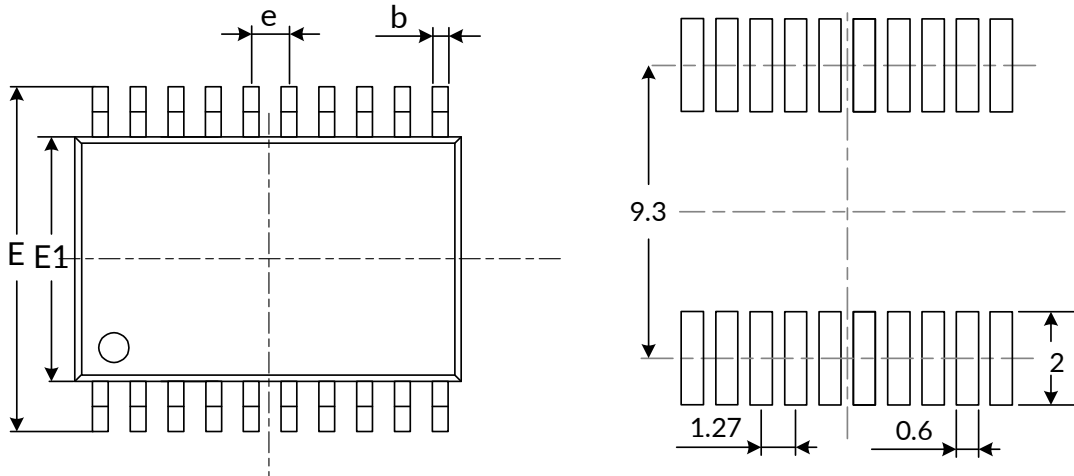
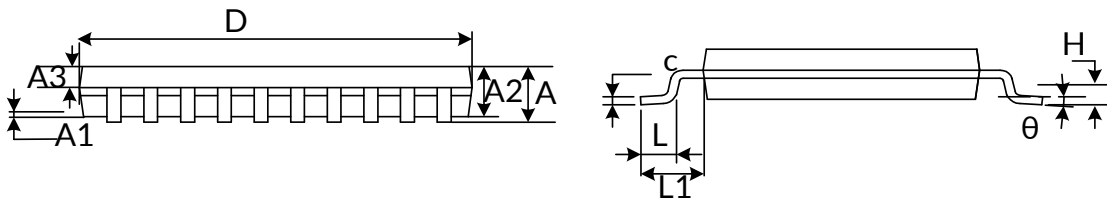
RECOMMENDED LAND PATTERN (Unit: mm)



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A ⁽¹⁾		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
A3	0.390	0.490	0.015	0.020
b	0.200	0.290	0.008	0.011
c	0.130	0.170	0.005	0.007
D ⁽¹⁾	6.400	6.600	0.252	0.260
E ⁽¹⁾	4.300	4.500	0.169	0.177
E1	6.200	6.600	0.244	0.260
e	0.650(BSC) ⁽²⁾		0.026(BSC) ⁽²⁾	
L	0.450	0.750	0.018	0.030
H	0.250(TYP)		0.010(TYP)	
θ	0°	8°	0°	8°
L1	1.000(REF) ⁽³⁾		0.039(REF) ⁽³⁾	

NOTE:

1. Plastic or metal protrusions of 0.15mm maximum per side are not included.
2. BSC (Basic Spacing between Centers), "Basic" spacing is nominal.
3. REF is the abbreviation for Reference.
4. This drawing is subject to change without notice.

SOP20⁽⁴⁾

RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A ⁽¹⁾		2.650		0.104
A1	0.100	0.300	0.004	0.012
A2	2.250	2.350	0.089	0.093
A3	0.970	1.070	0.038	0.042
b	0.390	0.470	0.015	0.019
c	0.250	0.290	0.010	0.011
D ⁽¹⁾	12.700	12.900	0.500	0.508
E	10.100	10.500	0.398	0.413
E1 ⁽¹⁾	7.400	7.600	0.291	0.299
e	1.270(BSC) ⁽²⁾		0.050(BSC) ⁽²⁾	
L	0.700	1.000	0.028	0.039
H	0.250(TYP)		0.010(TYP)	
θ	0°	8°	0°	8°
L1	1.400(REF) ⁽³⁾		0.055(REF) ⁽³⁾	

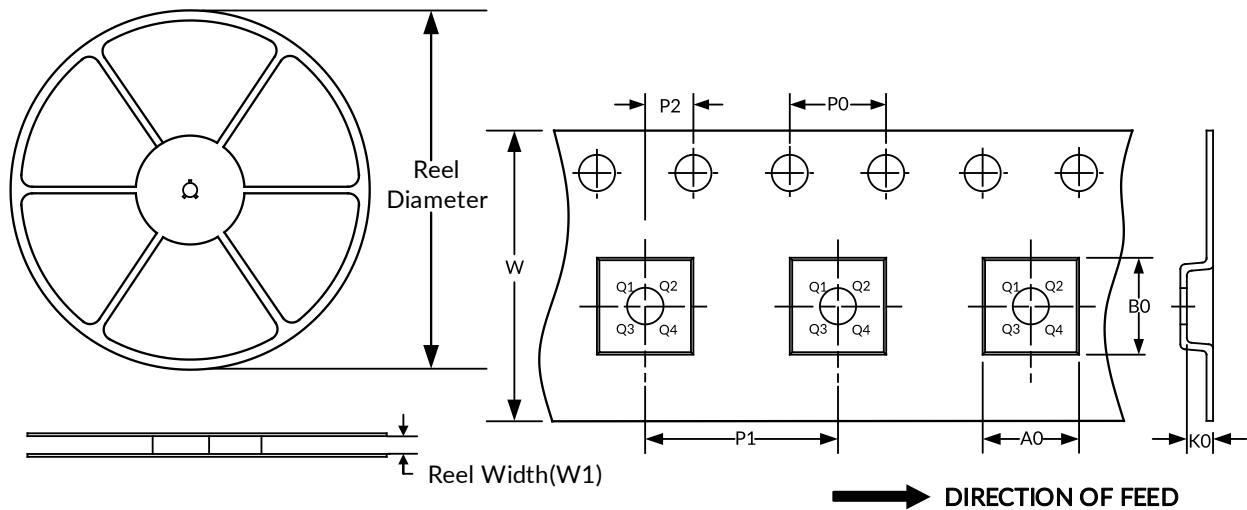
NOTE:

1. Plastic or metal protrusions of 0.15mm maximum per side are not included.
2. BSC (Basic Spacing between Centers), "Basic" spacing is nominal.
3. REF is the abbreviation for Reference.
4. This drawing is subject to change without notice.

12 TAPE AND REEL INFORMATION

REEL DIMENSIONS

TAPE DIMENSION



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width(mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TSSOP20	13"	12.4	6.75	6.95	1.20	4.0	8.0	2.0	16.0	Q1
SOP20	13"	24.4	10.75	13.55	2.65	4.0	12.0	2.0	24.0	Q1

NOTE:

1. All dimensions are nominal.
2. Plastic or metal protrusions of 0.15mm maximum per side are not included.

IMPORTANT NOTICE AND DISCLAIMER

Jiangsu Runic Technology Co., Ltd. will accurately and reliably provide technical and reliability data (including data sheets), design resources (including reference designs), application or other design advice, WEB tools, safety information and other resources, without warranty of any defect, and will not make any express or implied warranty, including but not limited to the warranty of merchantability Implied warranty that it is suitable for a specific purpose or does not infringe the intellectual property rights of any third party.

These resources are intended for skilled developers designing with Runic products You will be solely responsible for: (1) Selecting the appropriate products for your application; (2) Designing, validating and testing your application; (3) Ensuring your application meets applicable standards and any other safety, security or other requirements; (4) Runic and the Runic logo are registered trademarks of Runic Incorporated. All trademarks are the property of their respective owners; (5) For change details, review the revision history included in any revised document. The resources are subject to change without notice. Our company will not be liable for the use of this product and the infringement of patents or third-party intellectual property rights due to its use.